

MAGIC / ROMA / ROYAL GRINDER CLEANING INSTRUCTIONS



Step 1: Make sure the machine is turned off and unplugged. Remove all beans from the bean container. Vacuum out all the beans that cannot be scooped out. Remove 2 philips head screws from bean container. Remove the bean container from machine by pulling straight up.

Step 2: Remove rubber gasket and vacuum out any additional beans and grinds from the grinder. Note that when you lift up the bean container the rubber gasket may still be attached to the plastic bottom.


Step 3: Coffee grinder adjustment level [has 1 -8 below it] Take index finder and place underneath where arrow is pointing and lift straight up. It has 2 plastic tables holding it in place. Note the position of the red dot on the outer ring to the red dot on the inner ring of your grinder.



Step 4: Turn the outer ring counterclockwise until the two blue lines are aligned and lift the inner ring from the grinder assembly.




Step 5: This is the inner ring [burr] shown above that you will be lifting up on. The arrows are pointing to the four tabs to lift up on.

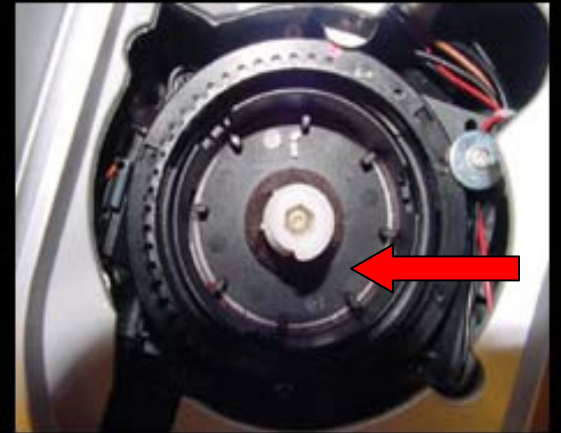

Step 6: This area should be vacuumed so that all coffee beans and grinds are removed.



Step 7: Drop the inner ring [burr] back inside with the blue lines aligned then turn the outer ring clockwise until it stops.

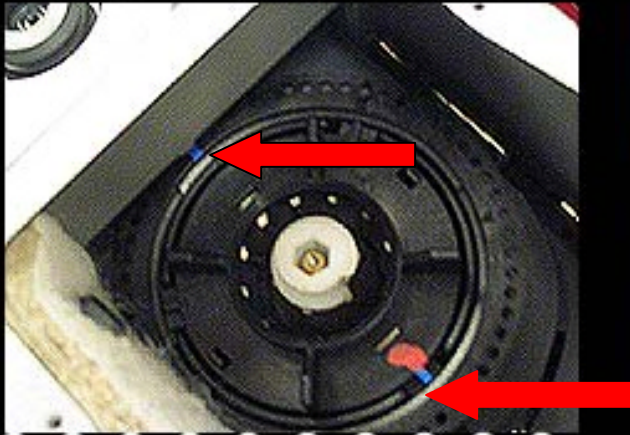


Step 8: Turn the outer ring counter clockwise until the blue stripe on the outer ring is 180 degrees opposite from the one on the inner ring.



Step 9: Now place the black rubber gasket back down onto the inner part (burr).



Step 10: Now the grinder setting arm needs to be placed back onto the outer-ring (little holes around it). Drop it down and snap in place at the # 4 grinder setting.

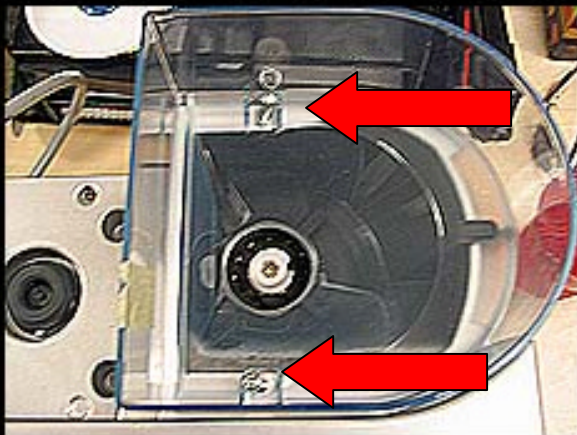

Step 11: Now place the bean container back on the unit and tighten down with the 2 Phillip Screws that were removed at the start.